


8. CYLINDER HEAD/VALVES


CAMSHAFT INSTALLATION

Turn the crankshaft clockwise, align the “T” mark on the flywheel with the index mark on the right crankcase cover (page 3-9).

Apply molybdenum disulfide oil to the camshaft journals of the camshaft holder.

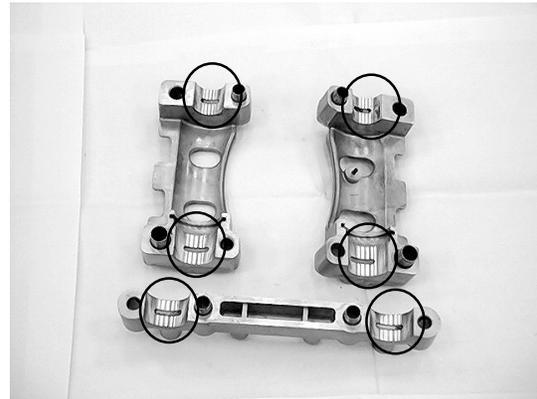

Apply molybdenum disulfide oil to the camshaft journals of the cylinder head.

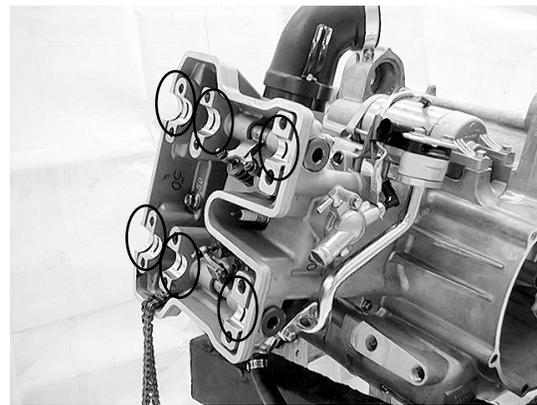

Install the cam chain over the cam sprockets and then install the intake and exhaust camshafts.

- *
- ◆ Install each camshafts to the correct locations.
 “IN”: no decompressor cam
 “EX”: has a decompressor cam (page 8-9)
 - ◆ Make sure the timing marks on the cam sprockets are flush with the cylinder head upper surface and punch marks face upward as shown.

